


YP-12+YC-12 Power Cord / IEC 320-C13 Connector

U.S.A and Japan



Specifications

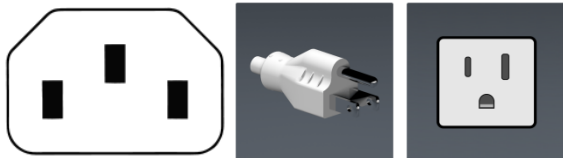






- Part No. : YP-12+YC-12
- U.S.A Plug | Type B
- Rating : 125VAC @ 10A
- Cord. : SVT, 18AWGx3C
- Color : Black
- Length : 6 feet
- Withstand : 2500VAC@1S
- Safety : UL, CSA
- IEC 60320-C13 Connector
- Weight (lbs) : 0.1

Used in: North and Central America, Japan

The Type B electrical plug has two flat parallel pins and a round grounding (or earth) pin. The earth pin is longer than the other two so that the device is grounded before the power is connected. As with the type A plugs, the American and Japanese versions vary slightly. Type B plugs are rated at 15 amps

YC-12 IEC 60320 C13 Connector



Country:	Wire Type:	Rating:
North-American continent 	SVT (3C) 18AWG SVT-shielded (3C) 18AWG SJT, SJT Shielded, 18AWG SJTW, SJTW Shielded, 18AWG SPT-2, 18AWG SJT, SJT-shielded, 16AWG SJTW, SJTW Shielded, 16AWG SJT, SJT-shielded, 14AWG SJTW, SJTW Shielded, 14AWG	10A,13A,15A 125V~,250V
	H05VV-F, 0.75mm ² x3C H05VV-F, 1.00mm ² x3C	10A 250V
Australia / New-Zealand 	H05VV-F, 0.75mm ² x3C H05VV-F, 1.00mm ² x3C	10A 250V
 Japan	(H)VCTF, 0.75mm ² (H)VCTF, 1.00mm ² (H)VCTF, 1.25mm ²	7A 125V 12A 125V 15A 125V
China 	RVV, 0.75mm ² RVV, 1.0mm ² RVV, 1.25mm ²	10A 250V
Taiwan 	(H)VCTF, 0.75mm ² (H)VCTF, 1.25mm ²	7A 125V 12A 125V 15A 125V
Korea 	(H)VCTF, 0.75mm ²	7A 250V