




- Features :
- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- Built-in EMI filter
- Trimming output(±10%)
- Remote ON-OFF control
- Protections: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- Epoxy encapsulated
- 100% burn-in test
- Approvals: FCC / CE
- 2 years warranty



SPECIFICATION

ORDER NO.	DKA30A-05	DKA30B-05	DKA30C-05	DKA30A-12	DKA30B-12	DKA30C-12	DKA30A-15	DKA30B-15	DKA30C-15	
OUTPUT	DC VOLTAGE			±5V			±12V			±15V
	CURRENT RANGE			±250 ~ ±2500mA			±125 ~ ±1250mA			±100 ~ ±1000mA
	RATED POWER			25W			30W			30W
	RIPPLE & NOISE (max.) Note.2			100mVp-p						
	LINE REGULATION Note.3			±0.5%						
	LOAD REGULATION Note.4			±0.5%						
	VOLTAGE ACCURACY			±2.0%						
	SWITCHING FREQUENCY			100KHz min.						
	EXTERNAL TRIM Adj. RANGE			±10%						
INPUT	VOLTAGE RANGE									
	A: 9 ~ 18VDC			B: 18 ~ 36VDC			C: 36 ~ 72VDC			
	EFFICIENCY (Typ.)									
	80%			80%			80%			81%
	DC CURRENT									
	Full load			A: 3.2A B: 1.5A C: 0.77A						
No load			A: 40mA B: 20mA C: 10mA							
FILTER										
Pi network										
REMOTE CONTROL										
Power on: R.C ~ -Vin > 4.5~5.5VDC or open, Power off R.C ~ -Vin < 0.8VDC or short										
PROTECTION										
Fuse recommended										
PROTECTION (Note. 5)	OVERLOAD									
	110 ~ 250% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed									
SHORT CIRCUIT	All output equipped with short circuit									
	Protection type : Hiccup mode, recovers automatically after fault condition is removed									
ENVIRONMENT	WORKING TEMP.									
	-25 ~ +85°C (Refer to output load derating curve)									
	WORKING HUMIDITY									
	20% ~ 90% RH non-condensing									
	STORAGE TEMP., HUMIDITY									
-40 ~ +105°C, 10 ~ 95% RH										
TEMP. COEFFICIENT										
±0.03% / °C (0 ~ 50°C)										
VIBRATION										
10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes										
SAFETY & EMC	WITHSTAND VOLTAGE									
	I/P-O/P:1KVDC									
	ISOLATION RESISTANCE									
	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH									
EMI CONDUCTION & RADIATION										
Compliance to EN55022 Class B, FCC part 15 Class B										
EMS IMMUNITY										
Compliance to EN61000-4-2,3,4,5,6,8, light industry level, criteria A										
OTHERS	MTBF									
	100Khrs min. MIL-HDBK-217F (25°C)									
	DIMENSION									
50.8*50.8*21.0mm or 2**2**0.82" inch (L*W*H)										
WEIGHT										
110g										


Mechanical Specification

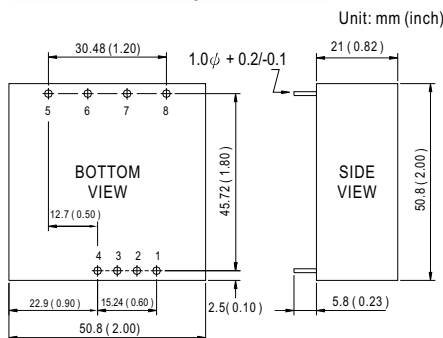

Pin Configuration

Pin No.	Output
1	R.C
2	No Pin
3	-Vin
4	+Vin
5	+Vout
6	COM
7	-Vout
8	TRIM

Derating Curve

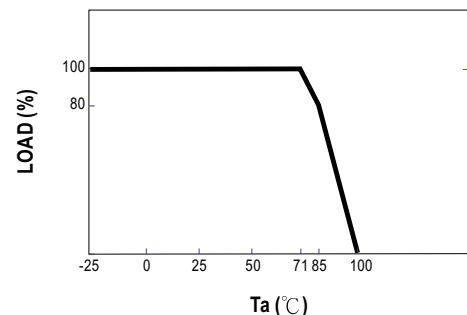

NOTE

1. All parameters are specified at normal input, rated load, 25°C 70% RH Ambient.
2. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
3. Line regulation is measured from low line to high line at rated load.
4. Load regulation is measured from 10% to 100% rated load.
5. Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.